



ROLLING SHUTTER SYSTEMS.

G:B:D:
CREATIVE AUTOMATIONS

MPS

230V



Central gearmotors for rolling shutters, for residential and commercial use.

EASY TO INSTALL

Thanks to the assembling kit, adaptors and cable included.

SILENT AND FAST

Exclusively made with high quality materials.

TECHNOLOGICAL AND SAFE

Limit switch adjusting system constrained to the reduction gear for an accurate and lasting adjustment. Protected electrical connections.

A COMPLETE AND RELIABLE RANGE


With or without electro-brake, single or bi-motor, a complete range for every kind of need.

TECHNICAL FEATURES


	MPS 120	MPS 120E	MPS 160	MPS 160E	MPS 240	MPS 240E
Motor power supply	230 Vac - 50/60 Hz	230 Vac - 50/60 Hz	230 Vac - 50/60 Hz	230 Vac - 50/60 Hz	230 Vac - 50/60 Hz	230 Vac - 50/60 Hz
Absorbed power	460 W	460 W	630 W	630 W	630 W	630 W
Absorbed current	2,2 A	2,2 A	2,7 A	2,7 A	2,7 A	2,7 A
Max torque	120 Nm	110 Nm	155 Nm	145 Nm	210 Nm	200 Nm
RPM	10	10	10	10	8	8
Limit switch range	5/6	5/6	5/6	5/6	5/6	5/6
Electro-brake	NO	YES	NO	YES	NO	YES
Pole diameter	200/220 mm	200/220 mm	200/220 mm	200/220 mm	240 mm	240 mm
Crown	60 mm	60 mm	60 mm	60 mm	76 mm	76 mm
Lifting power	120 Kg	120 Kg	160 Kg	160 Kg	180 Kg	180 Kg
Thermal cut out	4 min	4 min	4 min	4 min	4 min	4 min
Operator weight	7 Kg	8 Kg	8 Kg	9 Kg	9 Kg	10 Kg

DIMENSIONS

MPS 120

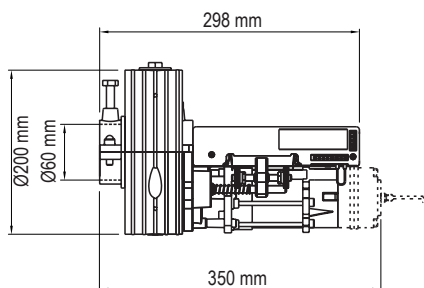

MPS 160

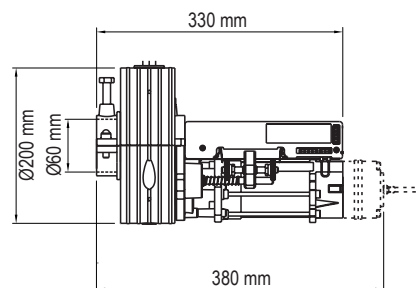

MPS 240

